

E195C

SCR
INSIDE



SPEC SHEET

E195C

ENGINE POWER	96 kW - 129 hp
MAX OPERATING WEIGHT	20400 Kg
BUCKET CAPACITY	0.24 m ³ - 0.90 m ³



BUILT AROUND YOU

EI95C

MORE PRODUCTIVITY

Tier 4 interim engine and SCR technology, which optimizes combustion, deliver more power. The hydraulic system maximizes performance according to the job at hand. High efficiency hydraulics and new joysticks with optional Hydraulic Proportional Controls (HPC) result in smooth operation, outstanding control and fast cycles. The new EI95C works faster and with more power, boosting productivity on site by up to 10%.



BEST FUEL ECONOMY

High efficiency intelligent hydraulics ensure 100% pump utilization in all applications. The hydraulic design minimizes friction losses and pressure drops. New ECO working mode optimizes fuel consumption while maintaining top performance. Together with New Holland's SCR technology, which allows the engine to operate at maximum efficiency, these features cut fuel consumption by up to 10% compared to previous model, reducing operating costs.

EVOLUTION IN COMFORT AND SAFETY

The EVO cab, with full size right window and rear-view camera, provides exceptional all-round visibility. Cab dampers and soundproofing result in remarkably low noise and vibration levels. Operators can work confidently in the ROPS/FOPS compliant cab.



BUILT IN RELIABILITY AND DURABILITY

With a proven heavy duty design, New Holland excavators continue to provide the ultimate reliability and durability that customers expect. Fast maintenance with all service points accessible at ground level. Built to provide maximum uptime for the customer.

SPECIFICATIONS



ENGINE TIER 4 INTERIM

Make and modelFPT F4HFE413H*A001
 Net flywheel Power (ISO 14396/ECE R120).....96 kW/129 hp (2200 rpm)
 Maximum torque.....496 Nm (1600 rpm)
 Type ... Water-cooled, direct injection type diesel engine with intercooler turbo-charger electric common-rail, Selective Catalytic Reduction (SCR) exhaust after treatment with AdBlue
 Displacement.....4.5 l
 N. of cylinders.....4
 Bore x stroke.....104 x 132 mm
Remote engine oil filter for easy replacement
Electronic engine rpm control, dial type
Auto-Idling selector returns engine to minimum rpm when all controls are in neutral position
-25° outside temperature start as standard equipment
 The engine complies with 97/68/EC standards stage 3B



ELECTRICAL SYSTEM

Voltage / Alternator24V / 70 A
 Starter motor4 kW
 Maintenance-free batteries.....2 x 12V / 160 Ah



TRANSMISSION

Typehydrostatic, two-speed, Automatic DownShift
 Travel motorsaxial piston type, double displacement
 Brakes.....automatic discs type
 Final drive.....oil bath, planetary reduction
 Gradeability70%
 Travel speedslow 0 - 2.9 km/h / high 0 - 4.9 km/h
 Drawbar pull.....225 kN



UNDERCARRIAGE

X-frame undercarriage design
 Reinforced track HD chain with sealed bushing

	E195C EL	E195C LC
Track rollers (each side)	8	8
Carrier rollers (each side)	2	2
Length of track on ground (mm)	3660	3660
Gauge (mm)	1990	2390
Shoes (mm)	500-600-700	600-700 800-900

Shoe typeTractor type triple grouser shoe
 No. for each side.....49
 Height of grouser shoe.....26 mm



HYDRAULIC SYSTEM

High capacity double pumps with electronic delivery adjustment.
 Variable displacement pistons pumps revert in neutral automatically to zero. Main Control Valve with Fail Safe Function and Anti drift valve.
 H.A.O.A. (Hydrotronic Active Operation Aid)
 E.S.S.C. (Engine Speed Sensing Control)
 D.O.C. (Dipper Optimised Control)
 C.P.B. (Continuous Power Boost)
 New generation A.E.P. (Advanced Electronic Processor)

3 working Modes

H Mode - Heavy duty excavation work
 S Mode - Standard digging and loading work
 E Mode - Fuel Economy

Attachments Modes

Breaker (One-way hydraulic flow)
 Nibbler (Two-way hydraulic flow)
 Attachments flow and pressure setting from cab, 20 presets storage

Hydraulic pump

Max flow at rated engine speed.....2 x 176 l/min
 Piloting circuit gear type pump.....max 22 l/min

Directional control valves

Type8-spool valve

System Pressures

Boom, Arm&Bucket34.3 MPa
 with Power Boost37.8 MPa
 Travel34.3 MPa
 Swing28 MPa
 Pilot control Circuit.....5 MPa



CAPACITIES

Engine oil12.1 l
 Fuel tank.....286 l
 Hydraulic system (included 154 l tank)195 l
 Cooling system.....22 l
 AdBlue tank (Urea)79 l



SWING

Swing motor.....axial piston type
 Swing brake.....hydraulic brake
 Swing speed.....0-11.5 rpm



CAB AND CONTROLS

Operator's cab

StructureFully enclosed steel structure
 EVO operator cabine..... evolution in comfort and safety compliant to ROPS (ISO 12117-2) and FOPS (ISO 10262 level II) standards
 Rear camera.....standard
 Monitor.....integrated multi-function control monitor with integrated rear view camera display

Operator's seat

Operator's seatAdjustable and reclining device

Operation


TravelTwo hand levers or two foot pedals for forward and backward operations of each track independently
 Excavating and swingTwo hand levers for four operations

Sound Level

External guaranteed sound level
 (EU Directive 2000/14/EC)LwA 101 dB(A)
 Operator cab sound pressure level (ISO 6396)LpA 68 dB(A)

DIMENSIONS - MONOBOOM

Boom lenght 5.2 m

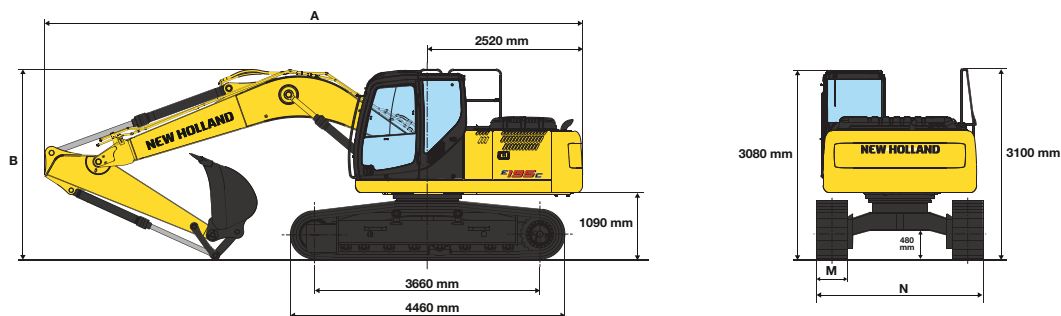

EL / LCVERSION

ARM		2200	2600	3100
A - Overall length	mm	8730	8680	8680
B - Boom height in transport position	mm	3090	2950	3030
Overall height	mm	3100	3100	3100

OPERATING WEIGHT - MONOBOOM


		EL VERSION			LC VERSION			
M - Shoe width	mm	500	600	700	600	700	800	900
N - Maximum width	mm	2490	2590	2690	2800	2900	3000	3100

2200 ARM		EL VERSION			LC VERSION			
Operating weight	kg	18690	18940	19210	18980	19250	19520	19810
Ground pressure	bar	0.50	0.42	0.37	0.42	0.37	0.33	0.3

2600 ARM		EL VERSION			LC VERSION			
Operating weight	kg	18720	18980	19250	19010	19290	19550	19840
Ground pressure	bar	0.50	0.41	0.37	0.42	0.37	0.33	0.30

3100 ARM		EL VERSION			LC VERSION			
Operating weight	kg	18820	19070	19340	19110	19380	19640	19930
Ground pressure	bar	0.50	0.41	0.37	0.43	0.37	0.33	0.30

DIMENSIONS - TRIPLE ARTICULATION

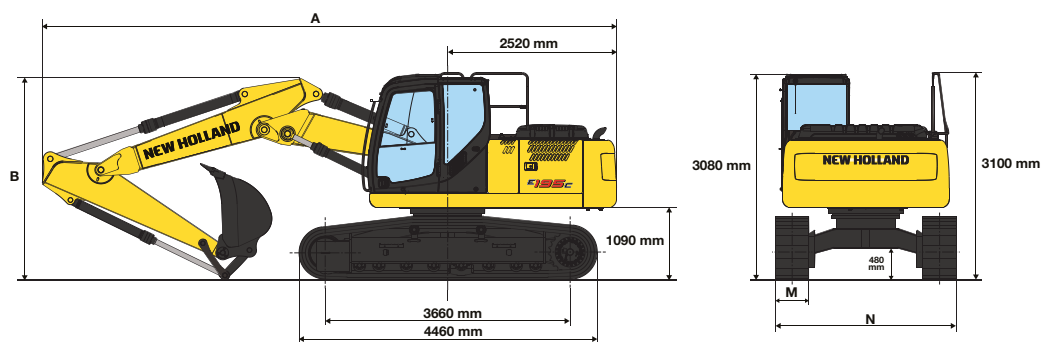

EL / LCVERSION

ARM		2200	2600	3100
A - Overall length	mm	8580	8530	8530
B - Boom height in transport position	mm	3020	2890	2990
Overall height	mm	3100	3100	3100

OPERATING WEIGHT - TRIPLE ARTICULATION

		EL VERSION			LC VERSION			
M - Shoe width	mm	500	600	700	600	700	800	900
N - Maximum width	mm	2490	2590	2690	2800	2900	3000	3100


2200 ARM		EL VERSION			LC VERSION			
Operating weight	kg	19150	19400	19670	19440	19710	19980	20270
Ground pressure	bar	0.51	0.43	0.38	0.43	0.38	0.33	0.30

2600 ARM		EL VERSION			LC VERSION			
Operating weight	kg	19190	19440	19710	19480	19750	20020	20310
Ground pressure	bar	0.51	0.41	0.38	0.44	0.38	0.34	0.30

3100 ARM		EL VERSION			LC VERSION			
Operating weight	kg	19280	19530	19800	19570	19840	20110	20400
Ground pressure	bar	0.52	0.41	0.38	0.44	0.38	0.34	0.30


COMPONENT WEIGHTS & DIMENSIONS (mm)

BOOM		MONO BOOM 5.2 m	TRIPLE ART.	
			ARM MAIN 2.288 m	ARM SEC. 2.511 m
Length	m	5.390	2.860	3.580
Height	m	1.5	0.570	0.820
Width	m	0.620	0.620	0.430
Weight	kg	1290 kg	800 kg	860 kg



MONOBOOM - TRIPLE ARTICULATION EL / LC VERSION

ARM		2200	2600	3100
Length	m	3.120	3.510	4.000
Height	m	0.800	0.740	0.820
Width	m	0.310	0.450	0.450
Weight	kg	630	680	750



Counterweight	kg	3650
---------------	----	------

BUCKETS

MONOBOOM / TRIPLE ARTICULATION


BUCKETS			EI95C EL			EI95C LC		
Capacity (ISO 7451)	Width	Weight	Arm mm			Arm mm		
m³	mm	kg	2200	2600	3100	2200	2600	3100
0.24	500	375						
0.43	780	475						
0.51	880	510						
0.63	1030	560						
0.80	1230	610						
0.90	1330	665						

- General digging work (specific weight of material < 1.8 t/m³)
- Slightly heavy digging work (specific weight of material < 1.5 t/m³)
- Loading work (specific weight of material < 1.2 t/m³)


E195C

DIGGING PERFORMANCE

MONOBOOM

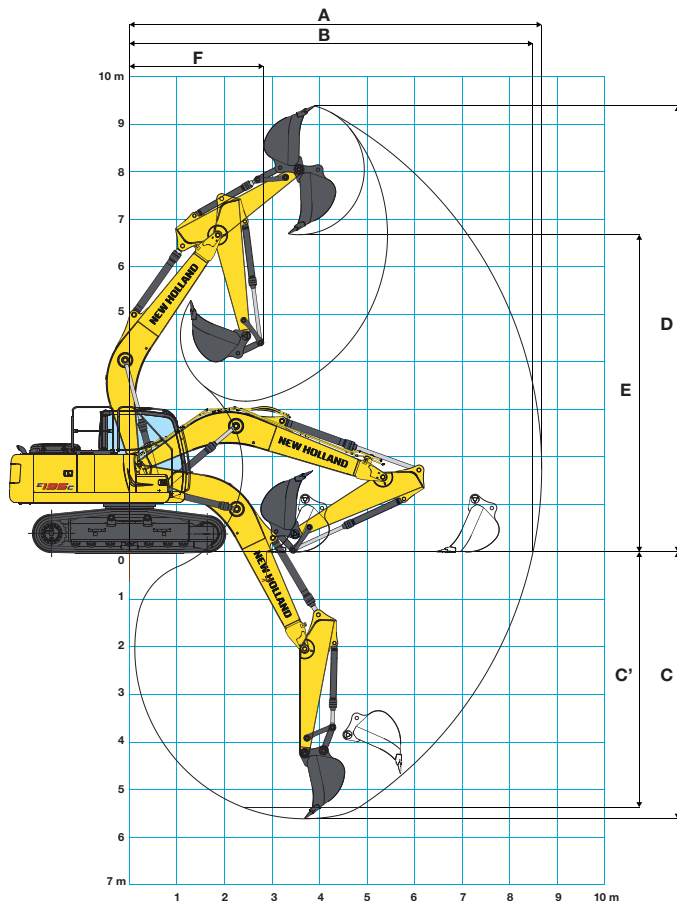

TRIPLE ARTICULATION

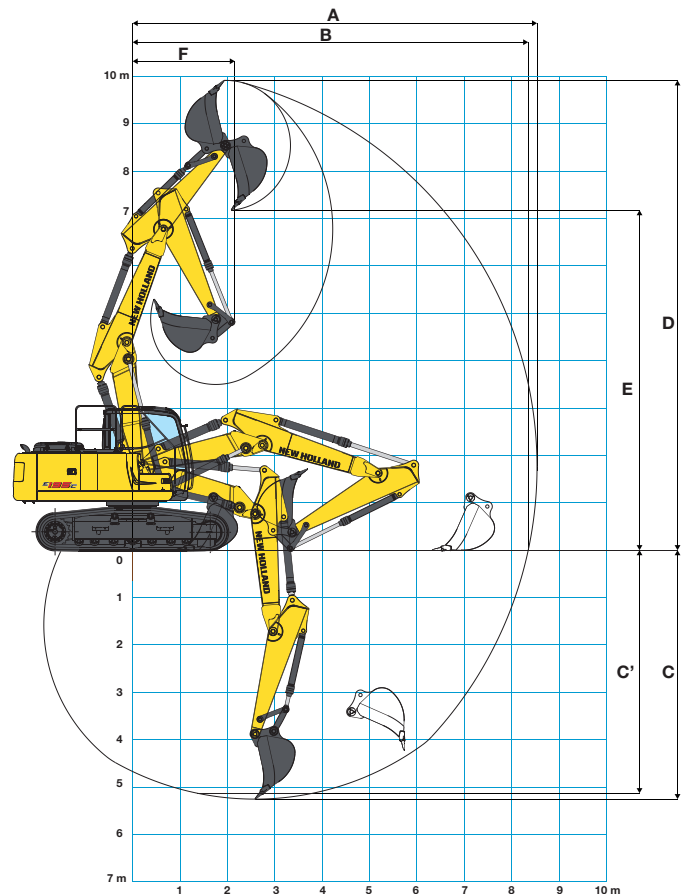

ARM		MONOBOOM			TRIPLE ARTICULATION		
		2200	2600	3100	2200	2600	3100
A - Max. digging reach	mm	8680	9030	9520	8540	8890	9390
B - Max. digging reach at ground level	mm	8490	8850	9350	8350	8710	9220
C - Max. digging depth	mm	5600	6000	6500	5240	5630	6130
C' - 2,4 mt level digging depth	mm	5360	5780	6320	5120	5510	6030
D - Max. digging height	mm	9400	9600	9980	9930	10220	10670
E - Max. dumping clearance	mm	6690	6890	7270	7190	7470	7930
F - Min. swing radius	mm	2830	2530	2560	2160	1960	2060

BREAKOUT FORCE

ARM		MONOBOOM / TRIPLE ARTICULATION		
		2200	2600	3100
Bucket	daN	12050	12050	12050
Arm	daN	10900	9200	7750

WITH "POWER BOOST" ON

ARM		MONOBOOM / TRIPLE ARTICULATION		
		2200	2600	3100
Bucket	daN	13100	13100	13100
Arm	daN	11900	10050	8450

LIFTING CAPACITY - EL VERSION

MONO BOOM - DIPPERSTICK 2200 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m													
+7.5 m					4.6*	4.6*					3.7*	3.7*	4.99
+6.0 m					4.5*	4.5*	4.3*	4.0			3.3*	3.3*	6.33
+4.5 m					5.1*	5.1*	4.4*	3.9			3.2*	3.0	7.12
+3.0 m					6.1*	5.5	4.8*	3.7	3.4*	2.7	3.3*	2.7	7.52
+1.5 m					7.0*	5.1	5.2*	3.5	4.3*	2.6	3.5*	2.6	7.62
0 m					7.3*	4.9	5.4*	3.4			3.9*	2.6	7.40
-1.5 m	6.1*	6.1*	9.9*	8.8	7.0*	4.9	5.2*	3.4			4.3*	2.9	6.86
-3.0 m	10.8*	10.8*	8.1*	8.1*	5.9*	5.0					4.2*	3.6	5.88
-4.5 m											3.4*	3.4*	4.18

TRIPLE ARTICULATION - DIPPERSTICK 2200 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m													
+7.5 m					6.4*	6.4*					3.8*	3.8*	4.77
+6.0 m					6.2*	6.2*	4.3*	4.3*			3.3*	3.3*	6.16
+4.5 m					6.5*	6.5*	4.1*	4.1*	4.3*	3.8	3.2*	3.1	6.97
+3.0 m	12.2*	12.2*	6.3*	6.3*	4.3*	4.3*	4.6*	3.7			3.3*	2.7	7.39
+1.5 m			8.8*	8.8*	5.3*	5.1	5.0*	3.5			3.5*	2.6	7.48
0 m	7.7*	7.7*	9.0*	8.7	7.0*	4.9	5.1*	3.4			3.9*	2.7	7.26
-1.5 m	7.7*	7.7*	7.1*	7.1*	5.7*	4.9	4.1*	3.4			3.5*	3.0	6.70
-3.0 m	10.2*	10.2*	5.0*	5.0*	3.5*	3.5*					2.6*	2.6*	5.70
-4.5 m													

MONO BOOM - DIPPERSTICK 2600 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m													
+7.5 m											2.5*	2.5*	5.51
+6.0 m							3.9*	3.9*			2.3*	2.3*	6.75
+4.5 m					4.7*	4.7*	4.2*	3.9			2.2*	2.2*	7.49
+3.0 m			8.6*	8.6*	5.8*	5.6	4.6*	3.7	3.7*	2.7	2.3*	2.3*	7.88
+1.5 m			6.5*	6.5*	6.8*	5.2	5.1*	3.5	4.2*	2.6	2.4*	2.4	7.96
0 m			7.0*	7.0*	7.3*	4.9	5.4*	3.4	4.3*	2.6	2.7*	2.4	7.76
-1.5 m	5.9*	5.9*	10.1*	8.7	7.2*	4.8	5.3*	3.3			3.3*	2.7	7.24
-3.0 m	9.4*	9.4*	8.8*	8.8*	6.3*	4.9	4.5*	3.4			4.1*	3.2	6.33
-4.5 m	5.9*	5.9*	4.1*	4.1*							3.7*	3.7*	4.79

TRIPLE ARTICULATION - DIPPERSTICK 2600 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m											3.6*	3.6*	2.86
+7.5 m							3.6*	3.6*			2.6*	2.6*	5.31
+6.0 m							4.3*	4.3*	3.4*	3.4*	2.3*	2.3*	6.59
+4.5 m					6.7*	6.7*	4.3*	4.3*	3.5*	3.5*	2.3*	2.3*	7.34
+3.0 m	11.4*	11.4*	6.7*	6.7*	4.1*	4.1*	3.9*	3.7			2.3*	2.3*	7.74
+1.5 m	6.4*	6.4*	7.4*	7.4*	5.0*	5.0*	4.5*	3.5	3.6*	2.6	2.4*	2.4*	7.83
0 m	6.1*	6.1*	8.6*	8.6*	6.6*	4.9	5.2*	3.4			2.7*	2.5	7.62
-1.5 m	6.2*	6.2*	8.1*	8.1*	6.1*	4.8	4.4*	3.3			3.3*	2.7	7.09
-3.0 m	9.9*	9.9*	5.4*	5.4*	4.2*	4.2*					2.8*	2.8*	6.16
-4.5 m													

MONO BOOM - DIPPERSTICK 3100 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m													
+7.5 m							2.4*	2.4*			1.9*	1.9*	6.21
+6.0 m							3.5*	3.5*			1.7*	1.7*	7.33
+4.5 m							3.8*	3.8*	2.9*	2.8	1.7*	1.7*	8.02
+3.0 m			7.4*	7.4*	5.3*	5.3*	4.3*	3.8	3.8*	2.7	1.7*	1.7*	8.38
+1.5 m			9.4*	9.3	6.4*	5.3	4.9*	3.6	4.0*	2.6	1.8*	1.8*	8.46
0 m			7.3*	7.3*	7.1*	4.9	5.2*	3.4	4.2*	2.5	2.0*	2.0*	8.27
-1.5 m	5.3*	5.3*	9.3*	8.6	7.2*	4.8	5.3*	3.3	4.0*	2.5	2.3*	2.3*	7.79
-3.0 m	8.0*	8.0*	9.5*	8.7	6.6*	4.8	4.8*	3.3			3.0*	2.8	6.95
-4.5 m	11.0*	11.0*	7.1*	7.1*	5.0*	4.9					3.6*	3.6*	5.60

TRIPLE ARTICULATION - DIPPERSTICK 3100 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m											2.4*	2.4*	4.06
+7.5 m							3.2*	3.2*	1.9*	1.9*	1.9*	1.9*	6.03
+6.0 m							3.6*	3.6*	1.7*	1.7*	1.7*	1.7*	7.18
+4.5 m							4.1*	4.1*	1.7*	1.7*	1.7*	1.7*	7.88
+3.0 m	14.8*	14.8*	6.7*	6.7*	4.4*	4.4*	3.0*	3.0*	2.9*	2.6	1.7*	1.7*	8.25
+1.5 m	4.8*	4.8*	6.3*	6.3*	4.4*	4.4*	3.7*	3.5	3.1*	2.6	1.8*	1.8*	8.33
0 m	4.8*	4.8*	8.5*	8.5*	5.9*	4.9	4.3*	3.3	3.3*	2.5	2.0*	2.0*	8.14
-1.5 m	6.4*	6.4*	9.0*	8.6	6.5*	4.8	4.7*	3.3			2.3*	2.3*	7.65
-3.0 m	9.4*	9.4*	6.4*	6.4*	4.9*	4.8	3.3*	3.3*			2.8*	2.8*	6.79
-4.5 m	10.3*	10.3*	4.5*	4.5*	3.1*	3.1*							

All the lift capacity values are in tonnes and without bucket

As per ISO 10567 the indicated load is no more than 87% of hydraulic system lifting capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.

LIFTING CAPACITY - LC VERSION

MONO BOOM - DIPPERSTICK 2200 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m												
+7.5 m					4.6*	4.6*					3.7*	3.7*
+6.0 m					4.5*	4.5*	4.3*	4.3*			3.3*	3.3*
+4.5 m					5.1*	5.1*	4.4*	4.3			3.2*	3.2*
+3.0 m					6.1*	6.1*	4.8*	4.1	3.4*	3.0	3.3*	3.0
+1.5 m					7.0*	5.8	5.2*	4.0	4.3*	2.9	3.5*	2.9
0 m					7.3*	5.6	5.4*	3.8			3.9*	2.9
-1.5 m	6.1*	6.1*	9.9*	9.9*	7.0*	5.5	5.2*	3.8			4.3*	3.2
-3.0 m	10.8*	10.8*	8.1*	8.1*	5.9*	5.6					4.2*	4.0
-4.5 m											3.4*	3.4*

TRIPLE ARTICULATION - DIPPERSTICK 2200 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m												
+7.5 m					6.4*	6.4*					3.8*	3.8*
+6.0 m					6.2*	6.2*	4.3*	4.3*	3.3*	3.3*	3.3*	3.3*
+4.5 m					6.5*	6.5*	4.1*	4.1*	4.3*	4.3	3.2*	3.2*
+3.0 m	12.2*	12.2*			6.3*	6.3*	4.3*	4.3*	4.6*	4.1	3.3*	2.8
+1.5 m					8.8*	8.8*	5.3*	5.3*	5.0*	3.9	3.5*	2.9
0 m	7.7*	7.7*			9.0*	9.0*	7.0*	5.6	5.1*	3.8	3.9*	3.0
-1.5 m	7.7*	7.7*			7.1*	7.1*	5.7*	5.5	4.1*	3.8	3.5*	3.3
-3.0 m	10.2*	10.2*			5.0*	5.0*	3.5*	3.5*			2.6*	2.6*
-4.5 m												

MONO BOOM - DIPPERSTICK 2600 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m												
+7.5 m											2.5*	2.5*
+6.0 m							3.9*	3.9*			2.3*	2.3*
+4.5 m					4.7*	4.7*	4.2*	4.2*			2.2*	2.2*
+3.0 m			8.6*	8.6*	5.8*	5.8*	4.6*	4.2	3.7*	3.0	2.3*	2.3*
+1.5 m			6.5*	6.5*	6.8*	5.9	5.1*	4.0	4.2*	2.9	2.4*	2.4*
0 m			7.0*	7.0*	7.3*	5.6	5.4*	3.8	4.3*	2.9	2.7*	2.7*
-1.5 m	5.9*	5.9*	10.1*	10.1*	7.2*	5.5	5.3*	3.8			3.3*	3.0
-3.0 m	9.4*	9.4*	8.8*	8.8*	6.3*	5.6	4.5*	3.8			4.1*	3.6
-4.5 m			5.9*	5.9*	4.1*	4.1*					3.7*	3.7*

TRIPLE ARTICULATION - DIPPERSTICK 2600 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m											3.6*	3.6*
+7.5 m							3.6*	3.6*			2.6*	2.6*
+6.0 m							4.3*	4.3*	3.4*	3.4*	2.3*	2.3*
+4.5 m					6.7*	6.7*	4.3*	4.3*	3.5*	3.5*	2.3*	2.3*
+3.0 m	11.4*	11.4*			6.7*	6.7*	4.1*	4.1*	3.9*	3.9*	2.3*	2.3*
+1.5 m	6.4*	6.4*			7.4*	7.4*	5.0*	5.0*	4.5*	3.9	2.4*	2.4*
0 m	6.1*	6.1*	8.6*	8.6*	6.6*	5.6	5.2*	3.8			2.7*	2.7*
-1.5 m	6.2*	6.2*	8.1*	8.1*	6.1*	5.5	4.4*	3.8			3.3*	3.1
-3.0 m	9.9*	9.9*	5.4*	5.4*	4.2*	4.2*					2.8*	2.8*
-4.5 m												

MONO BOOM - DIPPERSTICK 3100 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m												
+7.5 m							2.4*	2.4*			1.9*	1.9*
+6.0 m							3.5*	3.5*			1.7*	1.7*
+4.5 m							3.8*	3.8*	2.9*	2.9*	1.7*	1.7*
+3.0 m			7.4*	7.4*	5.3*	5.3*	4.3*	4.2	3.8*	3.0	1.7*	1.7*
+1.5 m			9.4*	9.4*	6.4*	5.9	4.9*	4.0	4.0*	2.9	1.8*	1.8*
0 m			7.3*	7.3*	7.1*	5.6	5.2*	3.8	4.2*	2.8	2.0*	2.0*
-1.5 m	5.3*	5.3*	9.3*	9.3*	7.2*	5.4	5.3*	3.7	4.0*	2.8	2.3*	2.3*
-3.0 m	8.0*	8.0*	9.5*	9.5*	6.6*	5.5	4.8*	3.7			3.0*	3.0*
-4.5 m	11.0*	11.0*	7.1*	7.1*	5.0*	5.0*					3.6*	3.6*

TRIPLE ARTICULATION - DIPPERSTICK 3100 mm

HEIGHT	RADIUS OF LOAD											
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE
+9.0 m											2.4*	2.4*
+7.5 m							3.2*	3.2*	1.9*	1.9*	1.9*	1.9*
+6.0 m							3.6*	3.6*	1.7*	1.7*	1.7*	1.7*
+4.5 m					4.7*	4.7*	4.1*	4.1*	1.7*	1.7*	1.7*	1.7*
+3.0 m	14.8*	14.8*			6.7*	6.7*	4.4*	4.4*	3.0*	3.0*	1.7*	1.7*
+1.5 m	4.8*	4.8*			6.3*	6.3*	4.4*	4.4*	3.7*	3.7*	1.8*	1.8*
0 m	4.8*	4.8*			8.5*	8.5*	5.9*	5.6	4.3*	3.8	2.0*	2.0*
-1.5 m	6.4*	6.4*			9.0*	9.0*	6.5*	5.4	4.7*	3.7	2.3*	2.3*
-3.0 m	9.4*	9.4*			6.4*	6.4*	4.9*	4.9*	3.3*	3.3*	2.8*	2.8*
-4.5 m	10.3*	10.3*			4.5*	4.5*					3.1*	3.1*

All the lift capacity values are in tonnes and without bucket

As per ISO 10567 the indicated load is no more than 87% of hydraulic system lifting capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.



STANDARD EQUIPMENT

- Tier 4 interim Engine 4 cylinders 4.5 liters
- SCR Engine Technology
- H.A. O.A. (Hydrotronic active operation aid)
- C.P.B. (Continuos Power Boost)
- Auto-Idling device
- I track guide for each side
- Two travel speed with Automatic Down Shift device
- Automatic fuel electrical pump
- Tool box
- Centralized boom lubrication
- Grease bath swing ring
- Standard -25° C engine cold start aid
- Rear mirror
- Rear view camera
- Two spot light on lifting boom
- Cab with structures compliant per ISO 12177-2 (ROPS) and ISO 10262 (FOPS)
- Transparent cab roof and opening front window
- Mechanical seat suspension
- Adjustable armrests
- New generation A.E.P. (Advanced Electronic Processor)
- Multi-function control monitor with integrated rearview camera, mode and attachments selection, gauges for coolant temperature, fuel tank, diesel exhaust tank and fuel economy. Menu functions for fuel consumption graphing, maintenance schedules, system status. Auto-Idling mode selector.
- Automatic air conditioner
- Radio USB&Bluetooth with speakers set
- Heavy lift switch
- Pressure drain switch
- Horn

OPTIONS

- Antitheft device
- Rotating beacon
- Cab additional lights and rain protection
- Cab front guard
- Lower frame cover
- Arm protection
- Front and rear additional track guide
- Hydraulic quick coupler provision
- Object handling kit
- Customer color
- Heated air suspension seat
- Hammer and crusher circuit with foot control
- Hammer and crusher circuit HPC (Hydraulic Proportional Control)
- Hammer, crusher and extra circuit (Hydraulic Proportional Control)
- One piece boom, triple articulation (2 piece boom)
- Arm :
 - 2200
 - 2600
 - 3100
- Shoes: EL version 500 - 600 - 700 mm
LC version 600 - 700 - 800 - 900 mm

Note: standard and optional equipment may vary by country. Consult your NEW HOLLAND dealer for specific details.

PARTS AND SERVICE

The New Holland dealer network is, in itself, the best guarantee of continued productivity for the machines it delivers to its customers. New Holland service technicians are fully equipped to resolve all maintenance and repair issues, with each and every service point providing the high standards they are obliged to observe under New Holland's stringent quality guidelines. The New Holland global parts network ensures fast, reliable, replacement parts for less downtime, increased productivity and, of course, profitable operation for its customers.



EUROPEAN PLANT SERVICES

www.europeanplantservices.com

European Plant Services
8 Carr Crofts Drive
Armley
Leeds
West Yorkshire
United Kingdom
LS12 3AL

Tel: +44 (0)113 2046919

Published by NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A
Printed in Italy - MediaCross Firenze - Cod 30652GB - Printed 01/13

Printed on recycled paper
CoC-FSC 000010 CQ Mixed sources



ELEMENTAL
CHLORINE
FREE
GUARANTEED



www.newholland.com

